

Cuda Top-Load Parts Washers are the clear choice for your cleaning jobs.

Cuda Top-Load Parts Washers use pressurized hot water and specialized industrial detergents with rust inhibitors to clean parts automatically – increasing productivity and saving money while protecting your workers from nasty solvents and manual scrubbing.



2216 SERIES

A compact top-load automatic parts washer that fits most commercial applications.


FEATURES

Turntable Diameter	22"	
Working Height	16"	
Load Capacity	500 lbs.	
Sump Capacity	23 Gallons	
Pump Motor	1 HP, 28 GPM @ 30 PSI	
Operating Temperature	150° - 170°F	

Dimensions: 52"h x 32"w x 42"d

Oil skimmer automatically removes and collects free oils; prolongs life of wash water (standard feature).

Easy access debris screen prevents foreign objects and small parts from falling into sump

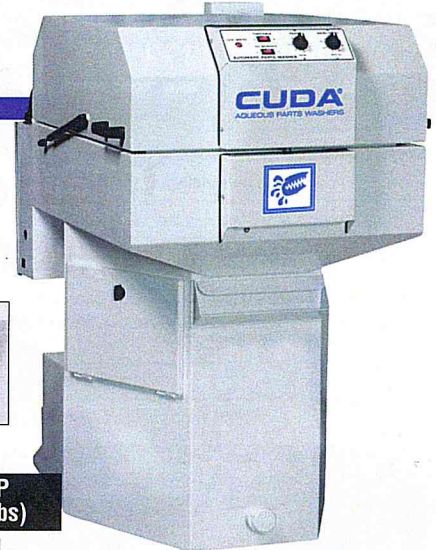

MODEL	WORKING HEIGHT	TURNTABLE DIAMETER	VOLT/PH	TOTAL AMPS	ELECTRIC HEATER (kW)	SHIP WT (lbs)
H2O-2216	16"	22"	115/1	15	2	461
H2O-2216	16"	22"	230/1	28	4.5	461
H2O-2216	16"	22"	208/1	30	4.5	461
H2O-2216	16"	22"	230/3	20	6	461
H2O-2216	16"	22"	460/3	10	6	461
H2O-2216	16"	22"	575/3	8	6	461
H2O-2216	16"	22"	208/3	21	6	461

Easy access sump cover permits quick and easy cleaning of the parts washer



2412 SERIES


Compact, entry-level model

FEATURES

Turntable Diameter	24"	
Working Height	12"	
Load Capacity	250 lbs.	
Sump Capacity	25 Gallons	
Pump Motor	1/2 HP, 20 GPM @ 22 PSI	
Operating Temperature	150° - 170°F	

Dimensions: 45"h x 35"w x 41"d

Automatic low water shut-off enhances safety and protects the heating element by automatically turning the unit off if the water level drops too low.



Oil skimmer automatically removes and collects free oils; prolongs life of wash water (standard feature).

Control panel has simple controls for heater, turntable and wash-cycle operation, plus low water shut-off indicator.



Upper drive arm rotates the turntable (shown with optional small parts basket and containment ring).



Shown with options

Removable debris screen prevents small particles and loose parts entering the cleaning solution.

MODEL	WORKING HEIGHT	TURNTABLE DIAMETER	VOLT/PH	AMPS	ELECTRIC HEATER (kW)	SHIP WT. (lbs.)
H2O-2412	12"	24"	115/1	13	1.8	424
H2O-2412	12"	24"	208/1	26	4.5	424
H2O-2412	12"	24"	230/1	24	4.5	424